

Physical Specification

Dimensions	375mm x 67mm max. (H x D)
Weight	350g (Identifier unit only)
Mounting bracket	min / max pole diameter: 25mm to 55mm

Electrical Specification

Power supply	Built in 2100mAh Lithium-Ion battery pack
Battery only	15 days continuous operation
Charge time	5 hours - Charging dock supplied with universal input AC adapter

Connectors

Single waterproof power and configuration connector built into base of the Identifier	✓
---	---

Data Interfaces

USB interface for configuration (via optional configuration dock)	✓
Batch configuration can be performed at manufacture on request	✓

User Interface

Status LED	✓
SOS button with configurable messaging	✓

GPS Receiver (AIS internal)

IEC61108-1:2003-07 Ed. 2.0 compliant 50 channel receiver	✓
WAAS / EGNOS enabled for improved position accuracy	✓

VHF Transceiver

Transmitter	x 1	█
Receiver	x 1	
Frequency	156.025 to 162.025MHz in 25KHz steps	
Output power	1W	
Channel bandwidth	25KHz	
Channel step	25KHz	
Modulation modes	25KHz GMSK (AIS, transmit only)	
Bit rate	9600 b/s (GMSK) and 1200 b/s (FSK)	
Receiver sensitivity	< -107dBm	

Environmental

IEC 60945	'Portable' category
Waterproof	Certified IPx8 Waterproof
Operating temperature	-20°C to +55°C


Certification

AIS Standard (Relevant parts of)	IEC62287-1:2010-11 IEC61097-14:2010 ITU-R M.1371-4 Universal AIS Technical Characteristics
Environmental standards	IEC60945:2002-08
Safety Standard	EN60950-1:2006 +A11:2009 +A1:2010 +A12:2011
GPS Performance standard	IEC61108-1:2003-07

Configuration


The Identifier can be configured to operate in either CSTDMA or SOTDMA modes	✓
Transmit frequency, security features, geo-fence, emergency alerts can all be configured	✓

Optional Accessories

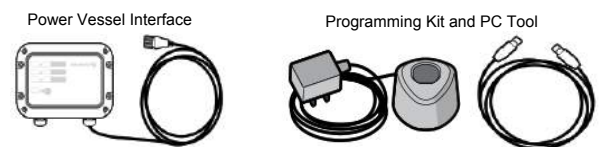

Product Code: 417-0006	Product Code: 417-0047
Should a permanent power installation be possible, the power vessel interface enables the identifier to be permanently installed and powered.	The identifier must be programmed prior to installation. Units can be supplied pre-programmed or multiple units can be programmed locally using the programming kit and PC tool.
To read more about the optional accessories please go to www.srt-marine.com	

What's In The Box

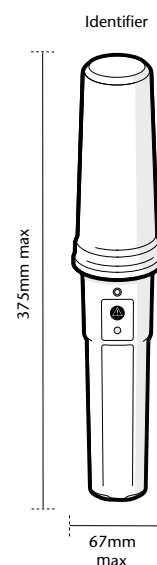

Accessories

In order to operate, the following accessories must be purchased


Vessel bracket and fixings



The identifier is fixed into position using the secure vessel bracket and fixings system.

Product Code: 417-0025

Charger



If the identifier is not connected to a permanent power source it will require charging.

Product Code: 417-0020

SRT enhances maritime domain awareness by developing and manufacturing tracking technology and system solutions for individual vessel owners, port authorities, maritime infrastructure owners, coast guards and national security agencies around the globe. Applications include the tracking of commercial and leisure vessels; sustainable fishery; anti-collision; search and rescue; waterway management, port and coast security; pollution management and environmental management.

Contact us now for your OEM requirements:

SRT Marine Systems plc
Wireless House
Westfield Industrial Estate
Midsomer Norton
Bath BA3 4BS, UK

T +44 (0) 1761 409 500
F +44 (0) 1761 410 093
E info@srt-marine.com
W srt-marine.com

